



# Lenovo Vibe Z2 Pro Motherboard Replacement

This guide will demonstrate how to replace the motherboard of your device.

Written By: Mitchell Beall



## INTRODUCTION


If your phone no longer powers on after replacing the battery, your motherboard might be defective. Learn how to replace it in this guide.

---

### TOOLS:


- [Spudger](#) (1)
  - [Metal Spudger](#) (1)
  - [T4 Torx Screwdriver](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Lenovo Vibe Z2 Pro Backplate Disassembly

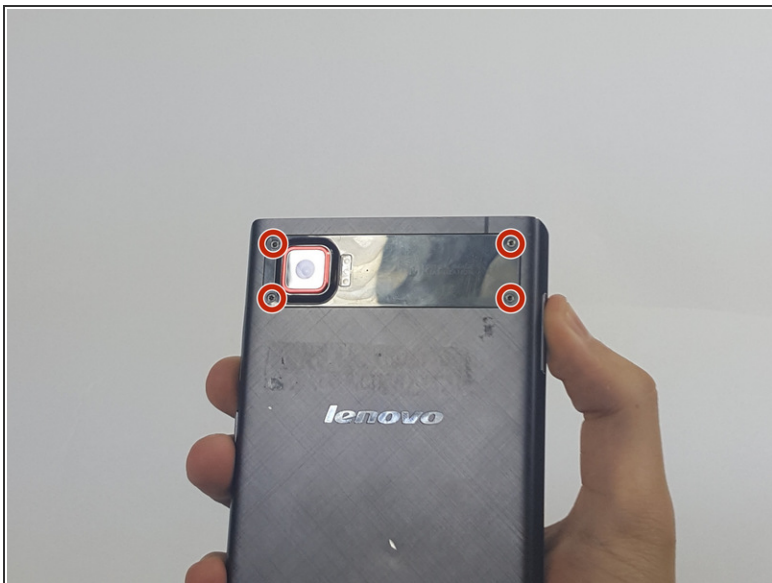


- Remove the 4.9 mm torx head screws located on the camera plate on the back of the phone

## Step 2

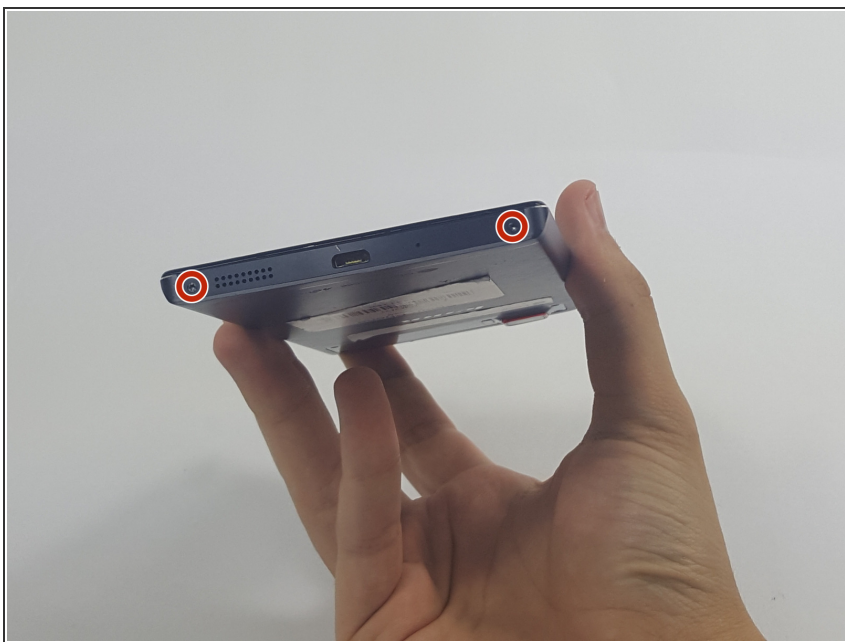

- Remove the 3.65 mm Torx head screws at the bottom of the phone.

## Step 3

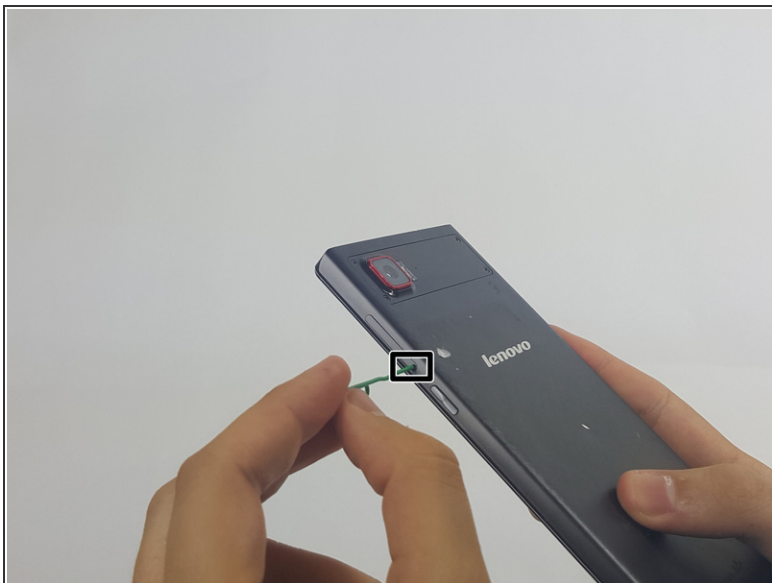

- Remove the SIM card tray by pushing a pin into the hole on the side of the phone.

## Step 4



- Push the Spudger along the gap between the phone and the backplate to separate them.




## Step 5




- Carefully pull the backplate away from the phone.

## Step 6 — Battery

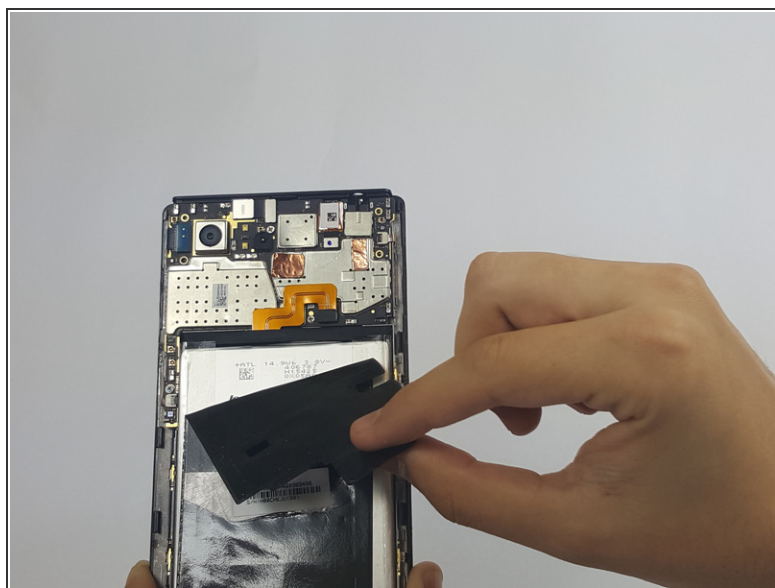

- Peel away protective the film using your hands.

## Step 7

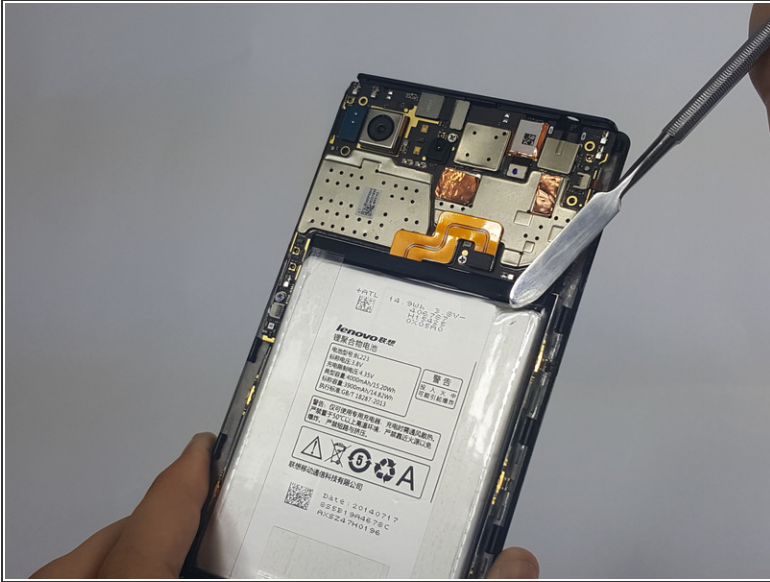

- Remove any adhesive strips holding the battery in place gently using a fingernail or spudger.


⚠ The regular black nylon spudger should be used whenever possible, especially around batteries.

## Step 8



- Disconnect the orange battery ribbon cable by gently lifting with a spudger.

## Step 9

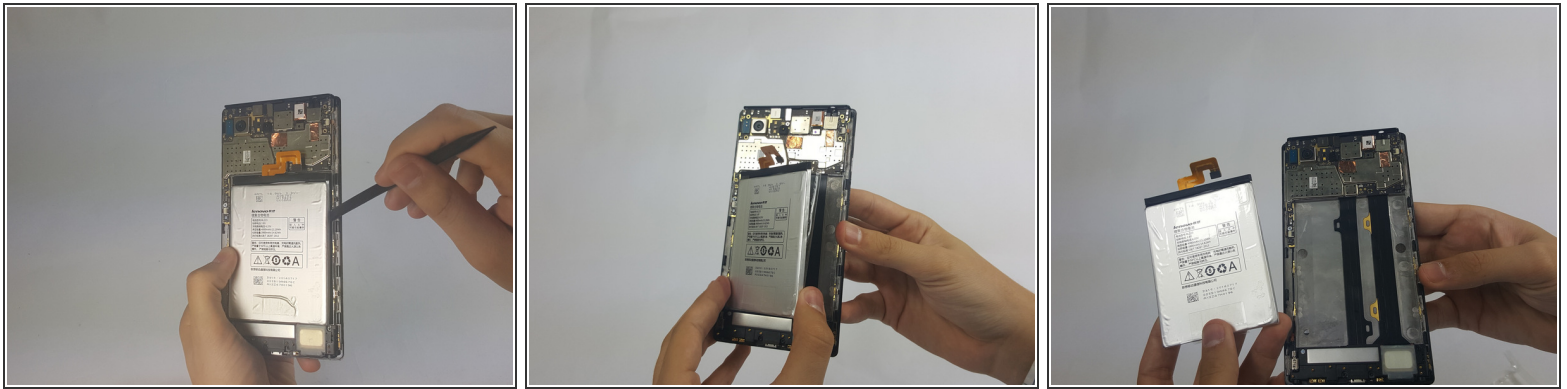

- Insert a fingernail or spudger into either side of the battery and lift upward.
- Remove the battery from phone.


## Step 10 — Motherboard



- Remove the 3.15mm Phillips Head #000 screws from motherboard.




## Step 11

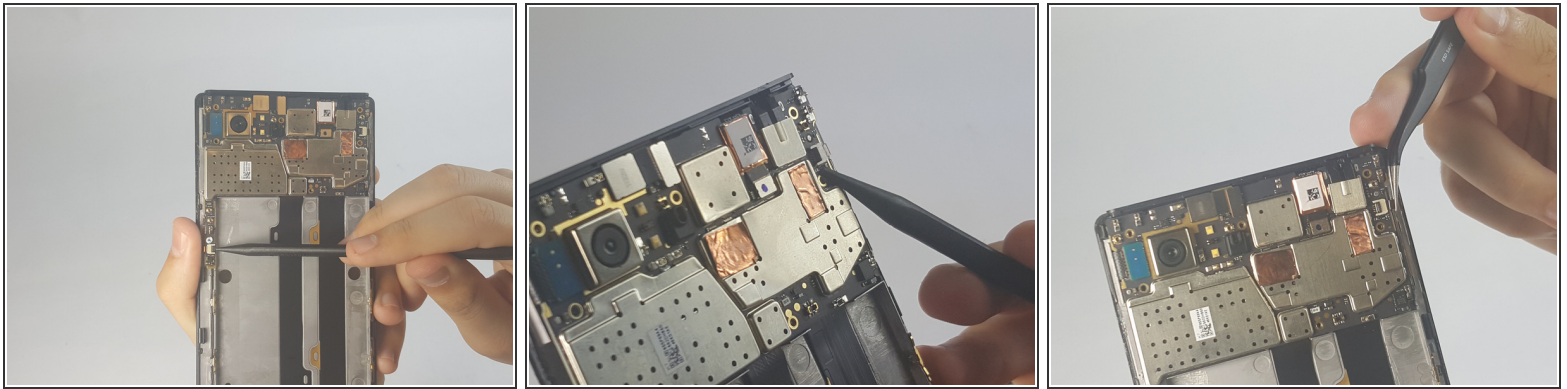

- Disconnect the two ribbon cables by gently lifting on the black hinges and pulling away with tweezers



## Step 12

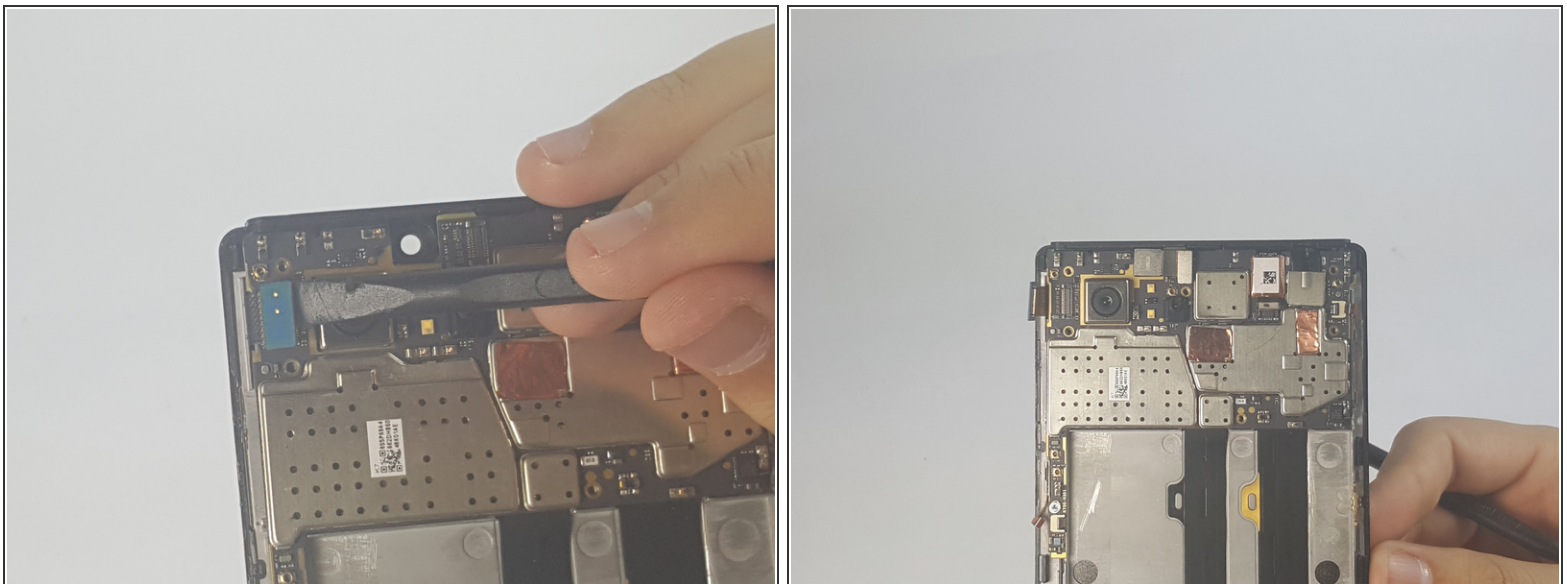

- Gently disconnect the rear-camera connector





## Step 13

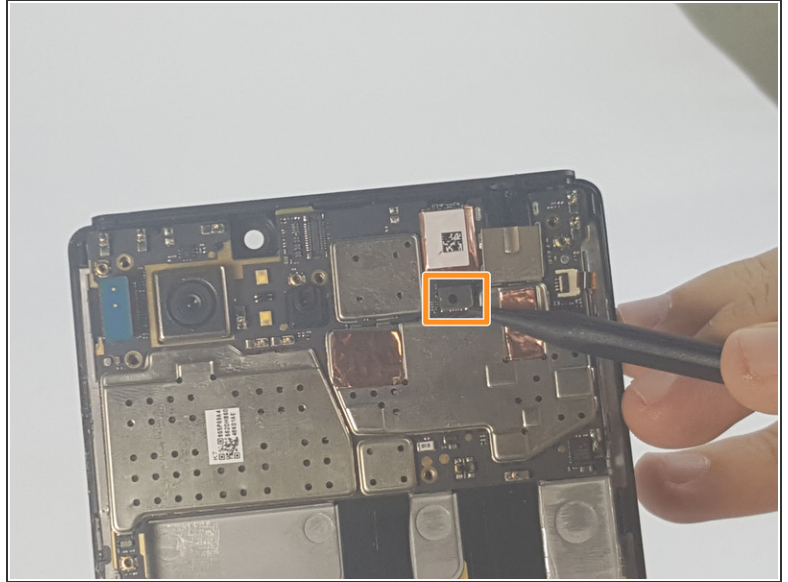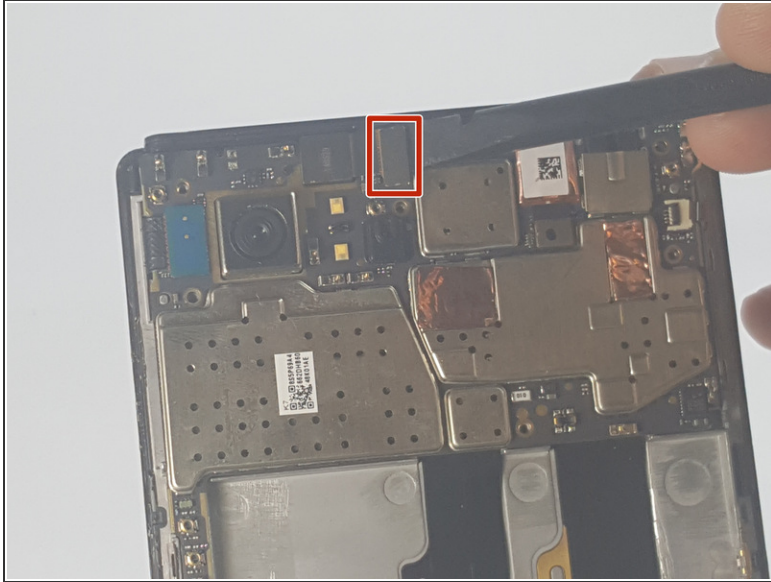


- Gently remove the front-facing camera by gently lifting on the connector tab.
- Remove the other connector by gently lifting with a spudger.

## Step 14

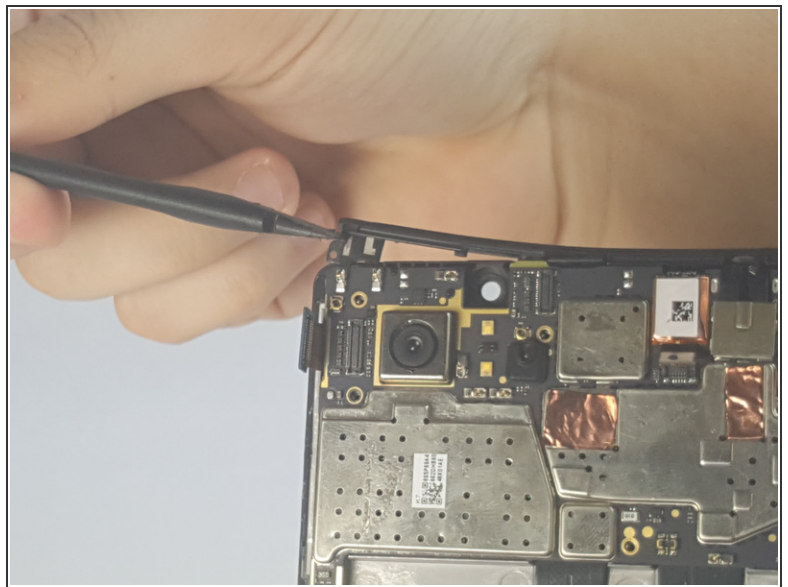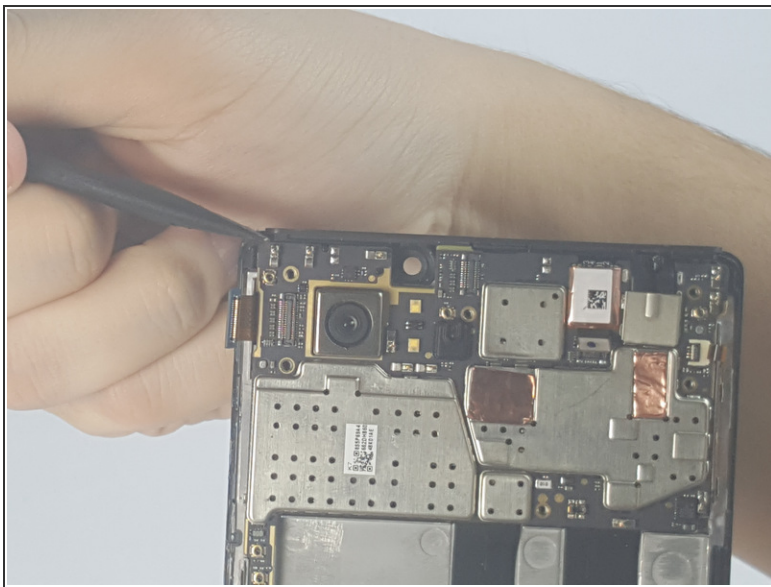


- Pry off the plastic brace along the top edge of the phone

## Step 15

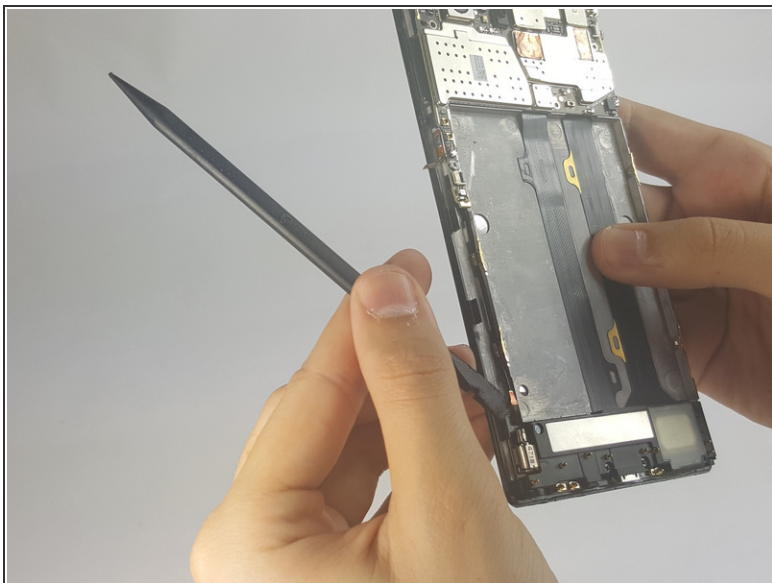



- Remove the antenna connected to the bottom piece of the screen plate

## Step 16

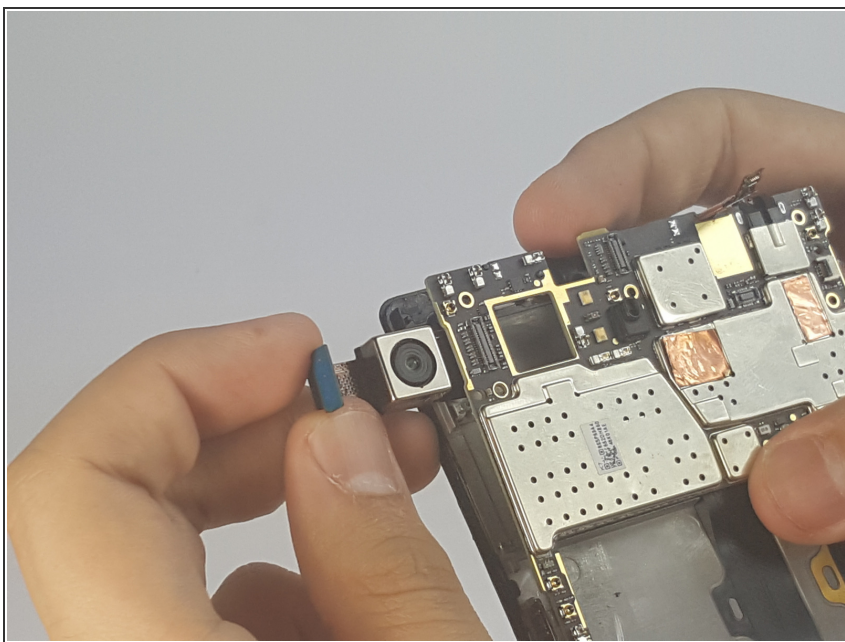

- Gently lift the motherboard off the frame
- Pull the camera out from behind the motherboard

## Step 17

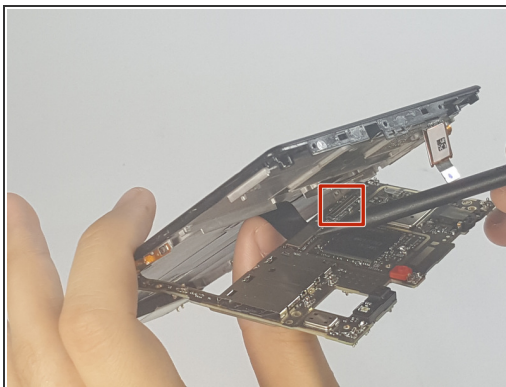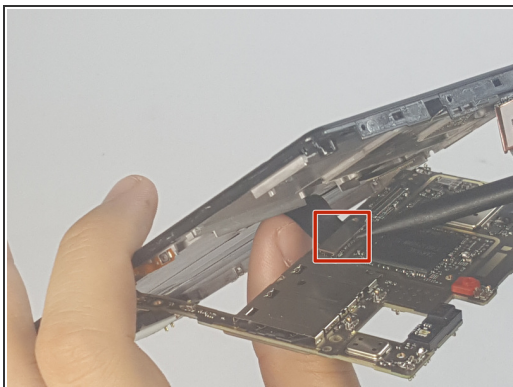

- Using a spudger, disconnect the charging port assembly cable and the screen connection cable.
- Remove the motherboard completely.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-28 12:33:06 PM.